



Bolton Gate Company

SUPERIOR LIFT DOOR

Folding Lift Shutter Door

Data Sheet ref. Lift 2

February 22



SUPERIOR LIFT DOOR SPECIFICATION SUMMARY

Bolton Gate Company's Superior Folding Lift Shutter Door offers all the advantages of a compact folding door arrangement but with the addition of an extremely robust and heavy duty design.

Manufactured without compromise, for many years the 'Superior Lift Door' has been the benchmark for the lift industry and this still continues today for projects in the UK and around the world. When there is a need for 'heavy duty' or when a Client is seeking greater longevity with the resultant lower maintenance costs the Bolton Superior Lift Door is the product of choice.

All the necessary testing and design considerations have been undertaken to ensure the door satisfies the requirements of EN81 Part 20 and Part 50 when specified.

Applications Include:-

Traditionally the Superior Lift Door is specified for use on goods lifts in supermarkets, shopping malls, retail stores, warehouses and storage facilities but there are countless other locations around world that have benefitted from it's integral strength and resilience for example, museums and galleries such as the V & A, London and Munch Museum, Oslo where it is used in the transportation of precious art work to the extreme opposite of heavy industry and it's use in the worlds largest diamond mine, Jubilee, in Botswana.

Performance Characteristics:

EN81 Part 58 (Rated E120 / EW20).

EN81 Part 20 compliant.

EN81 Part 50 compliant.

Key Attributes:

Perfect solution for goods lift car and landing doors.

Heavy duty construction.

Bespoke, compact design.

Compliant with relevant EN81 requirements.



Bolton Gate Company

SUPERIOR LIFT DOOR

Heavy Duty Folding Lift Shutter Door

Data Sheet ref. Lift 2

February 22

Operation

The Superior Lift Door is a manually operated door system.

Despite it's extremely robust and heavy duty construction, the sliding folding gate frame easily allows the door to be pulled or pushed into position with the minimum of effort.

Gate Frame

In this step up from the Eurofold Lift Door, the Superior's greater resilience stems from the additional strength of it's gate frame. This gate frame boasts 3mm thick double channel vertical pickets which are interconnected by 6mm thick solid steel lattice bars.

The gate frame is top hung from a ball bearing pulley connected to the picket by zinc plated pulley brackets.

Additionally, at the base, the frame is fitted with zinc plated guide pieces designed to engage within the bottom track.

Leading Edge

The heavy duty leading edge is fabricated from steel channels and 3mm thick full height side plates. This leading edge can be prepared for optional locks, latches or interlock beaks etc.

A Number 10 bow handle is fitted as standard for ease of operation.

Shutter Leaves

The shutter leaves are rolled from galvanised steel and are available in a 152mm standard width. A 229mm leaf option is also available.

Top Track

The shutter is suspended from a top track constructed from two 90mm deep galvanised steel sections bolted together to provide a smooth running carrier for the gate frame. Being compact in design only minimal headroom is required for the top track.

Bottom Track

The bottom guide pieces are retained within a 26 x 26mm galvanised steel channel type bottom track.

If existing bottom tracks or cills are to be re-used, specially milled guides can be supplied to suit the existing track dimensions.

Finish

Mainly galvanised steel with remaining components finished with a coat of primer paint.

Maximum Size

7000mm wide x 7000mm high

3640mm wide x 2990mm high (for EN81 Part 58)

Weight

Varies with opening size but approximately 38kg/m².

Options




- Vision Panel.
- Holdfast Magnet.
- Mathews Catch.
- Electro-magnet (Car Doors).
- VL10 Gatelocks (Landing Doors).
- Low level VL10 Gatelock release (Landing Doors).
- Complete and partial subframe assemblies (Landing Doors).
- Heavy duty cills (Landing Doors).
- Stainless steel finish to face side.
- Polyester powder coat finish.

To specify this product please state:

Superior Lift Door shall be by Bolton Gate Company Ltd, Waterloo Street, Bolton BL1 2SP, UK

Tel: 01204 871001;

E-mail: sales@boltongate.co.uk **Web:** www.boltongate.co.uk

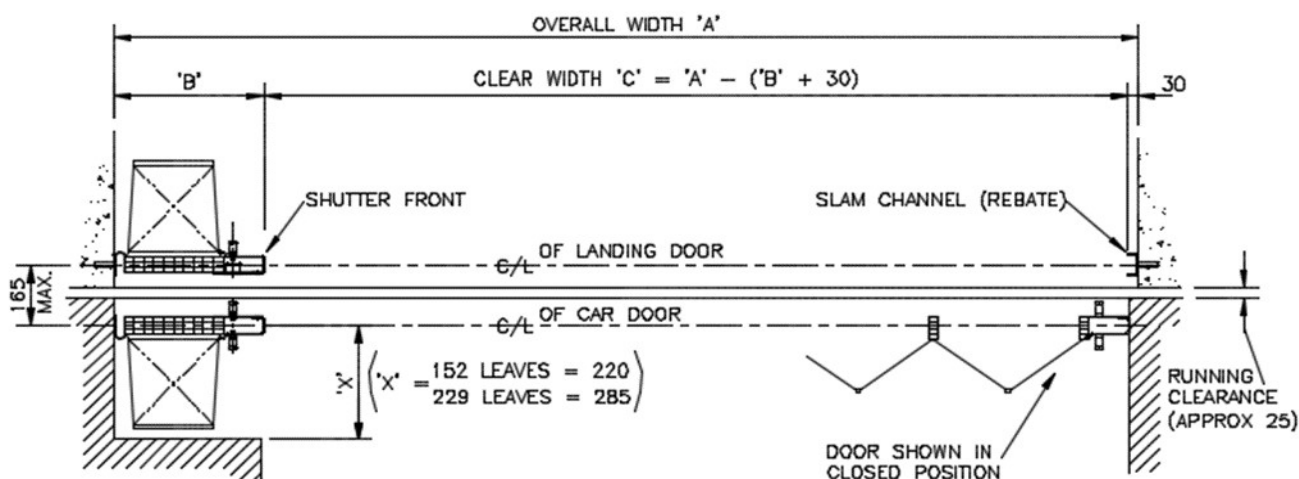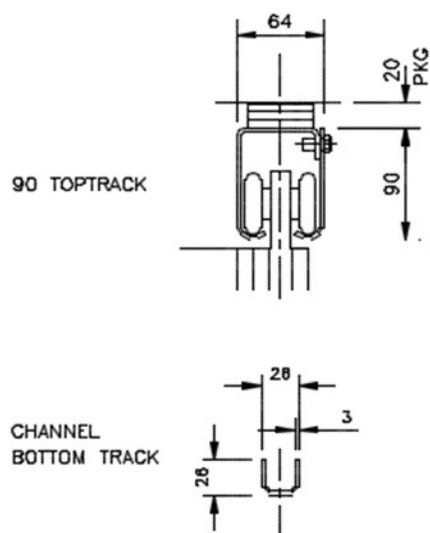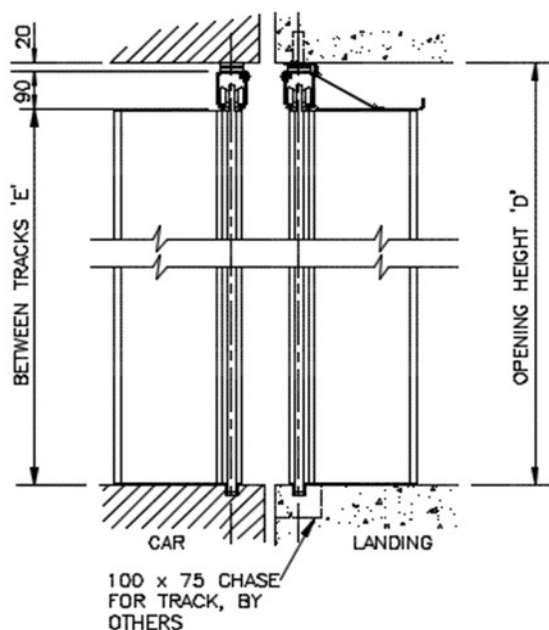

152mm LEAVES	DIM 'C'	765	1030	1295	1560	1825	2090	2355	2620	2885	3150
	DIM 'A'	1020	1312	1604	1896	2188	2480	2772	3064	3356	3648

229mm LEAVES	DIM 'C'	1185	1590	1995	2400	2805	3210	3615	4020	4425	4830
	DIM 'A'	1440	1872	2304	2736	3168	3600	4032	4464	4896	5328

BUNCH	DIM 'B'	225	252	279	306	333	360	387	414	441	468
-------	---------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

NOTE!

THE OVERALL WIDTH AND BUNCH DIMENSIONS ARE CALCULATED USING BOLTON GATE STANDARD 117 ROLLED OR 127 FABRICATED FRONTS. TOP TRACK LENGTH = OVERALL WIDTH - 12.

ALL DIMENSIONS IN mm